

Barcode Scan Engine

1D CCD
SE-1000C

World's Best Product


- Scan Speed : 350 scans/sec
- Barcode Type : 1D CCD
- Size : 21*23*11 (mm)



1D CCD Scan Engine

SE-1000C

Features

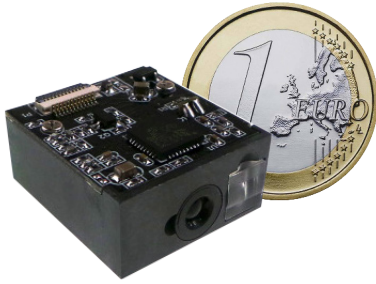

1. 뛰어난 스캔 속도 : 350 scans/sec
2. 작은사이즈 & 무게 : 21 × 23 × 11 mm
3. 뛰어난 내구성 : 낙하시험 1.2m
4. 저전력 작동 : 3.3V / 5V, 120mA
5. 간편한 통합 인터페이스 : USB, RS-232 TTL
6. 가시성이 높은 조준광원(Aimer)
7. 다양한 사용처 : 바코드스캐너, PDA, 키오스크, 출입통제 시스템 등

Specifications

Physical Characteristics			
Dimensions	21mm x 23mm x 11mm (0.83in x 0.91in x 0.43in)	Configurations	Decode
Weight	6g (0.21 oz)		
Environmental			
Temperature	Operating: -0°to 65°C / 32°to 149°F	Ambient Light	Fluorescent light 4000 lx max , direct sun light 80,000 lx max ,white light 4000 lx max
	Storage: -30°to 70°C /-22°to 158°F	Shock Drop Test	1.2m drop onto concrete surface
Humidity	5 - 90% (operation) 5 - 90% (storage)		
Electrical			
Interface	TTL-232 / USB	Interface Connector	0.5-12P FPC
Voltage Requirement	DC 3.3/5V±10%	Current Consumption	Max:120mA
Optical Characteristics			
Photo Sensor	CCD linear sensor	Sensor Resolution	2500pix
light Source	632nm red led		
Electrical			
Scan Rate	350±50 (scans/second)	Scan Angle	Pitch angle ±30°
Voltage Requirement	DC 3.3/5V±10%		Skew angle ±70°
Min X Dimension	0.101mm/4mil (PCS 0.9)		Tilt angle ±45°
Print Contrast	20%UPC/EAN 13 (13mil)	Curvature	R≥15 mm (EAN8), R≥20 mm (EAN13) (resolution=0.26mm, PCS=0.9)
Supported Barcode Symbologies			
Supported Barcode Symbologies	EAN13, EAN8, UPC A,UPC E, CODABAR (NW-7), CODE 39, CODE 93, INTERLEAVED 2OF5, STANDARD 2OF5, MATRIX 2OF5, CODE 128, EAN/UCC 128, CODE 11, CHINESE POST		

*기능 및 사양은 예고 없이 변경될 수 있습니다.

